



GOLF

Trojan Battery – The World’s Most Trusted Golf Batteries

With over 80 years of experience, Trojan Battery delivers the world’s most trusted deep cycle batteries for use in golf cars, utility and neighborhood electric vehicles (NEV).

Trojan’s broad portfolio of deep cycle golf batteries are available in 6-volt, 8-volt and 12-volt sizes and features our proprietary Maxguard[®] Advanced Design Separator and exclusive Alpha Plus[®] paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs. And because we know the importance of battery maintenance and the impact it has on your battery’s life, Trojan introduces the **HydroLink™ Watering System**, with unique features and benefits not available in the golf market today, for faster, easier and safer battery watering. The HydroLink™ System is available in 36-volt and 48-volt systems to fit all popular electric golf cars.

Trojan’s Golf/Utility/NEV products deliver superior performance and is why:

- **All electric vehicles built by the world’s top golf car manufacturers roll off the assembly line with Trojan batteries under the seat**
- **More than 98% of America’s top golf courses use Trojan batteries in their fleets ***

Trojan Battery’s durability, longevity and proven technology means you can depend on our batteries for consistent performance day in and day out—whether you are playing golf all day or driving around town. We offer outstanding technical support provided by full-time application engineers.

Trojan batteries are available worldwide through Trojan’s Master Distributor Network.


Call 800-423-6569 or 562-236-3000 for more information or visit us at www.trojanbattery.com

* Based on listing of top golf courses in Golf Digest, Golf Magazine and the US Open list of venues 1995 – 2010

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes			CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@56 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES											
GC2	T-605	383	-	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	-	115	185	225	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	-	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	-	132	195	240	1,3,4,5,9	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	-	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	-	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	-	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
8 VOLT DEEP CYCLE BATTERIES											
GC8	T-860	-	90	-	125	150	1	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC8	T-875	295	117	-	145	170	1,3,4	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	63 (29)
GC8	T-890	340	132	-	155	190	1,3,4	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	69 (31)
12 VOLT DEEP-CYCLE BATTERIES											
N/A	T-1260 Plus	260	90	60	113	140	1,2,4	12 7/8 (327)	7 1/8 (181)	10 11/16 (272)	78 (35)
N/A	T-1275	280	102	-	120	150	1	12 7/8 (327)	7 1/8 (181)	10 7/8 (276)	82 (37)
N/A	T-1275 Plus	280	102	-	120	150	1,2,4	12 7/8 (327)	7 1/8 (181)	10 11/16 (272)	82 (37)
6 VOLT DEEP-CYCLE GEL BATTERIES											
GC2	6V-GEL	394	-	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

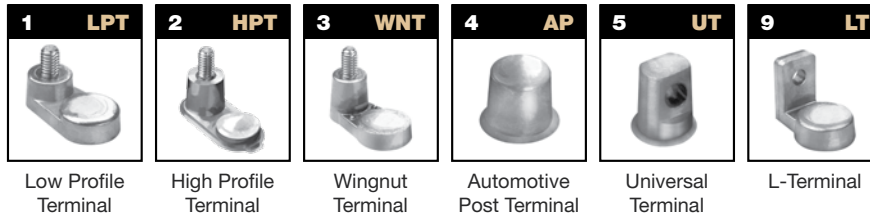

BATTERY WATERING SYSTEM



Available for 36-volt and 48-volt systems. To learn more visit www.trojanbattery.com/HydroLink



For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com