

XTREME POWER CONVERSION XST

Standby UPS // 120VAC

For more information, visit www.xpcc.com/xst



Safeguard your computer from power outages with dependable power protection

The compact XST is a single phase standby UPS designed to deliver power protection to small routers, switches, desktop PCs, VoIP equipment, phone systems, and point of sale equipment. A vital addition to any home office, it enables graceful shutdown of equipment during a longer power outage.

PRODUCT SNAPSHOT

- › Available models: 400VA, 600VA, 800VA
- › Compact size and lightweight design
- › RoHS, TAA compliant
- › Floor, desk, or wall mount
- › Primary applications: home or small office, desktop computers, routers, switches, and telecom closets
- › 2 years electronics, 2 years battery warranty (USA and Canada)

FEATURES

Compact design—allows for horizontal or vertical placement; keyholes enable this lightweight UPS to be conveniently mounted on a wall

Ease of use—plug and play functionality means the UPS is ready to start backing up your equipment right out of the box

Auto restart—after full battery discharge, the XST automatically restarts when utility power returns

Full protection—discharge, overcharge, short circuit, and thermal protection

Cold start function—UPS can start on batteries

USB communications—USB port available on XST-600 and XST-800 models; enables plug and play communications between servers, desktops, and the UPS; offers seamless installation with Windows, Mac, Solaris, and Linux operating systems

\$25,000 load protection policy—protection against damaged connected equipment


XTREME
Power Conversion®

Protect your business.

MODEL SELECTION GUIDE

For more information, visit www.xpcc.com/xst

MODEL NUMBER		XST-400	XST-600	XST-800
CAPACITY	Power rating	400VA (240W)	600VA (360W)	800VA (480W)
INPUT	Voltage	120VAC		
	Frequency	60Hz		
OUTPUT	Voltage	120VAC		
	Waveform	Sine wave (normal), simulated sine wave (battery mode)		
	Frequency	60Hz ± 1Hz		
	Transfer time	2–6ms		
BATTERY	Battery type	Sealed, maintenance free lead acid		
	Battery quantity and size	(1) 12V 4.5AH	(1) 12V 7AH	(1) 12V 9AH
	Recharge	8 hours to 90% capacity		
PHYSICAL	UPS dimensions (W x D x H)	3.2 x 8.9 x 8.1 in (vertical stand position)		
	Shipping dimensions	4.7 x 11.4 x 11.0 in		
	UPS weight	4.8 lbs	5.9 lbs	6.8 lbs
	Shipping weight	5.6 lbs	6.7 lbs	7.6 lbs
	Line cord	5 ft, 5–15P		
	Receptacles	(4) NEMA 5–15R		
ENVIRONMENT	Operating temperature	32–104°F (0–40°C)		
	Humidity	0–90%		
	Altitude	11,500 ft above sea level		
INDICATORS & ALARMS	AC mode	Blue LED ON		
	Battery mode	Blue LED flashes every 10 sec; audible alarm flashes every 10 sec		
	Low battery	Blue LED flashes every sec; red LED ON; audible alarm flashes every sec		
	Fault	Red LED ON; continuous audible alarm		
	Over temperature protection	Red LED flashes every 0.5 sec		
WARRANTY	2 years electronics, 2 years battery (USA and Canada)			
COMMUNICATIONS INTERFACE	None		USB	
INCLUDED IN BOX	User manual		ViewPower CD, USB cable, user manual	

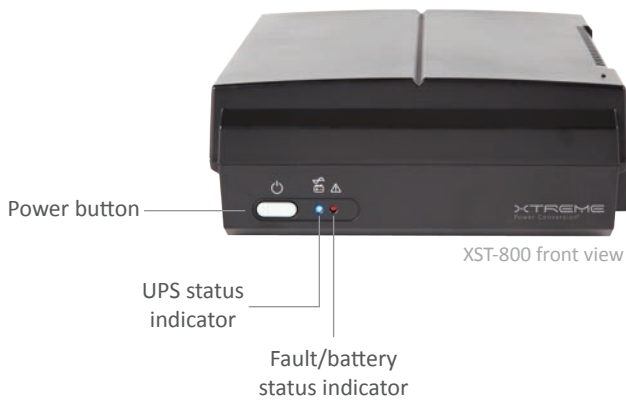

X-TREME
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2020 Xtreme Power Conversion Corporation. All Rights Reserved. XST.01U (Rev 1/15/20)